


RollMet-NS



Cover Type:	Rubber	
Possible applications:	Production of metal strip: pinch rolls, hold-down rolls, steering, bridle and detour rolls, conveyor rollers, oil distribution and wipe-off rolls, squeegee rolls in different environments Specifically recommended in contact with oil and when clear colour or non-staining properties are requested Recommended for mechanical rollers on coil and colour coating lines	
Hardness Range:	65, 75, 80, 85, 90 Shore A	
Available Colours:	beige	
Recommended Cover Thickness:	min. 10 mm - max. 25 mm	
Temperature resistance:	Dry:	continuous 100°C / peak 110°C
	Wet:	continuous 70°C / peak 80°C
Properties and advantages:	Excellent resistance to mineral and vegetable oil, fuel, grease and (animal) fat Very good physical properties, tear and abrasion resistance, good elasticity and resilience Non-staining in contact with delicate substrates Good and stable grip in contact with most substrates Very good squeegee and wipe-off behaviour	
Chemical resistance:	Acid solutions:	Moderate
	Alkaline solutions:	Good
	Hot water and steam:	Moderate
	Ozone:	Good
	Oil and grease:	Excellent
	Aromatic solvents (toluene, benzene,...):	Moderate
	Chlorinated solvents:	Not suited
	Polar solvents (MEC, ether, acetate,...):	Not suited
	Alcohols (ethanol, IPA,...):	Very good
Recommended cleaning products:	(Hot) water, soap, most industrial cleaners, alcohol, light fuel, turpentine, white spirit	
Remark:	Suited for NaOH and KOH solutions up to 5 % concentration, at temperature of max. 75 °C	

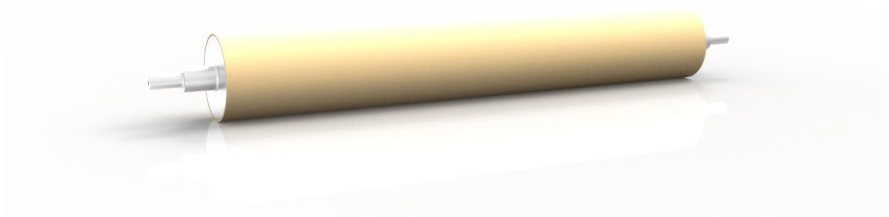